


SL-5 PLC Heat Sealer

LAKO TOOL & MFG., INC. IS PROUD TO INTRODUCE THE **SL-5 PLC Heat Sealer**. The **SL-5** is an extremely accurate heat sealer designed to enhance heated crimp seals for the flexible packaging industry. The PLC controlled heat sealer, with its touch screen and accurate sealing ability is easy to operate. By simply changing the values on the touch screen which include, sample size, pressure, temperature and dwell time, the operator can quickly change the variables from test to test. The **SL-5** insures sealing consistency for each sample. The built-in dual-load cells measure the actual force applied to the film. The PLC controlled temperature is assured to $\pm 1.1^{\circ}\text{C}$ ($\pm 2^{\circ}\text{F}$) across the entire width of the film sample.

The **SL-5** stores the test results which can be easily recalled and viewed. The optional communications port allows the operator to quickly communicate test results for reporting purposes.

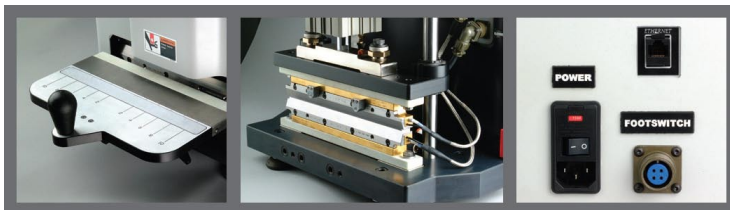

▲ Manual Loading Tray

▲ Quick Change Seal Jaws

▲ Footswitch, Power Module & Ethernet Port

Optional Features

- Additional quick-change seal jaw inserts with any seal pattern 5 to 12 in long (12.7 to 30.4 cm)
- Manual sample loading tray accepts film 2 to 12 in wide (5 to 30.4 cm)
- Auto cooling (*Lowers Temperature Faster*)
- Ethernet connection with software for data collection
- Footswitch
- Phenolic seal jaw tray
- On site training

Standard Features

- Direct-touch color screen
- PLC controlled pressure, temperature and dwell time
- Independent upper and lower sealing temperatures
- Dual-load cell design for accurate and consistent sealing surface pressures
- Measures actual dwell time on the sealing sample
- Stores data for each test run
- One pair of Quick-Change Seal Jaw Inserts 5 to 12 in long (12.7 to 30.4 cm) with desired seal pattern (*The quick-change seal jaw inserts allow the operator to change the sealing pattern in a matter of minutes without having to change heaters or wiring*)
- Safety guards and switches for safe operation
- Case with hardware

SL-5 PLC Heat Sealer

Performance Data

Sealing Temperature

Range	Ambient - 400°C (752 °F)
Resolution	± 0.1°C (1.8 °F)
Measuring Accuracy	± 0.70°C (1.26 °F)
Control Band	± .2 °C (0.36 °F)

Sealing Pressure (actual pressure applied per unit of film)

Range	137.9 kPa - 4830 kPa (20 psi - 700 psi)
Resolution	0.7kPa (0.1 psi)

Sealing Dwell Time

Range	0.50 - 99.99 s
Resolution	10 ms
Control Accuracy	± 0.025 ms
Repeatability	± 10ms

Dual Load Cells - left & right

Capacity	1000 lbs. total (362 kg)
Accuracy	0.2 lbs. or less, (0.09 kg)
Repeatability	0.2 lbs. or less, (0.09 kg)
Calibration	ASTME-4 standard

Sealing Jaw Options

Length	12 in (30.4 cm) Maximum
Width	0.197 - 1.00 in (5 - 25.4 mm)
Seal Surface	Flat, Vertical, Horizontal, Custom or Standard Geometry
	*All jaws designed for quick & easy changeover

Machine Requirements

Power	110V to 240V 50/60 Hz, 1000VA
Air (clean, dry)	90psi - 120psi (90psi recommended) Minimum pressure switch is built in.

Physical Specifications

W x D x H	23 in x 17 in x 26-3/8 in (58.4 cm x 43.1 cm x 68 cm)
Weight	145 lbs. (65.75 kg)



For more information on **Lako's SL-5 PLC Heat Sealer**, or any of our products, call **Testing Machines Inc.** at 631-439-5400 or email: info@testingmachines.com

Main Headquarters

Testing Machines Inc. 2 Fleetwood Court Ronkonkoma, NY 11779 Tel: (631) 439-5400 Fax: (631) 439-5420 info@testingmachines.com	Messmer Instruments Unit F1 Imperial Business Estate West Mill, Gravesend Kent DA11 0DL UK Tel: +44 (0) 1474 566488 Fax: +44 (0) 1474 560310	Büchel BV Fokkerstrat 24, 3905 KV Veenendaal, Netherlands Tel: +33 (0)318 521500 Fax: +33 (0)318 5400358	Lako Tool and Manufacturing Inc. 7400 Ponderosa Road Perrysburg, Ohio 43352 Tel: (419) 662-5256 Fax: (419) 662-8225	Lawson Hemphill 1658 G A R Highway Swansea, MA 02777 Tel: (508) 679-5364 Fax: (508) 679-5396 Information@ lawsonhemphill.com	Adamel Lhomargy SARL Z.A. de l'Habitat, Bâtiment 6 Route d'Ozoir, 77680 Roissy en Brie, France Tel: +33 (0) 1 6440291 Fax: +33 (0) 1 64409211	TMI Canada P.O. Box 203 Pointe-Claire Dorval QC, H9R-4N9 CAN Tel: (514) 426-5855 Fax: (514) 426-1557
---	---	---	--	---	--	--

